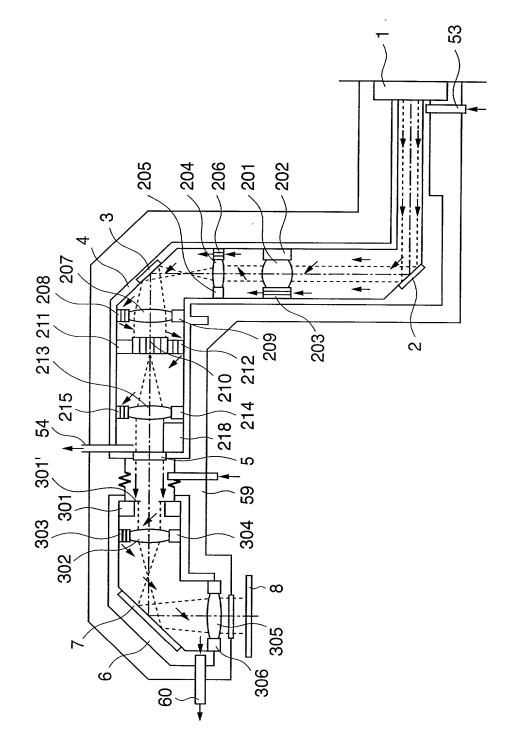
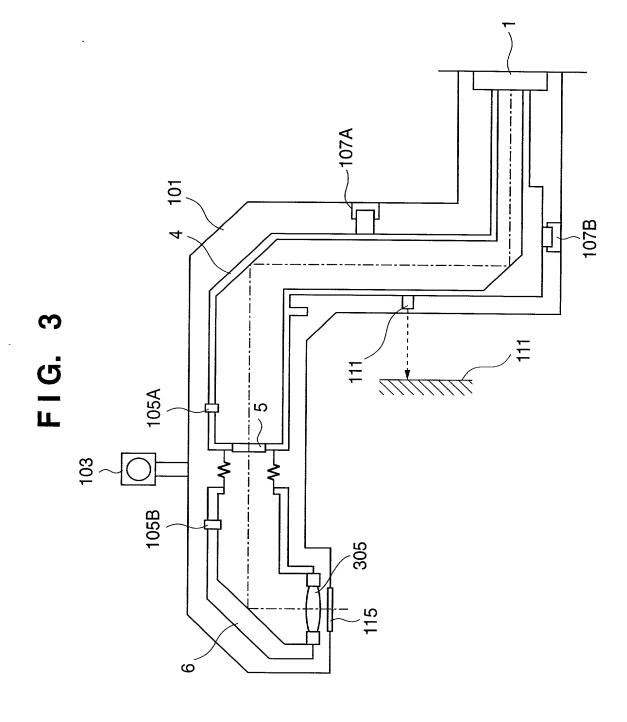
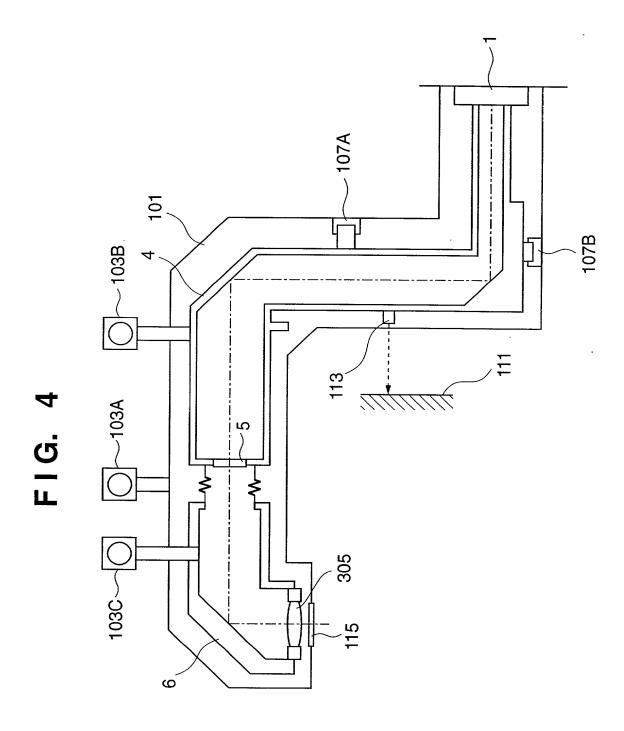


FIG. 2









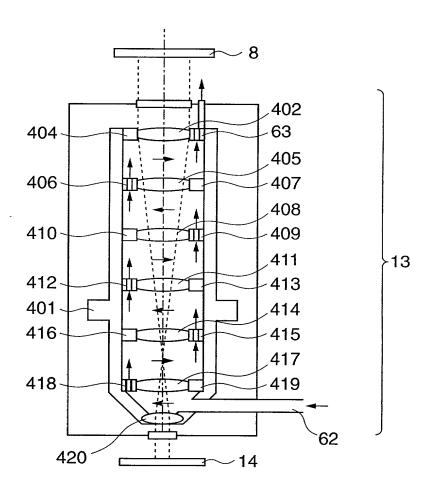



FIG. 6

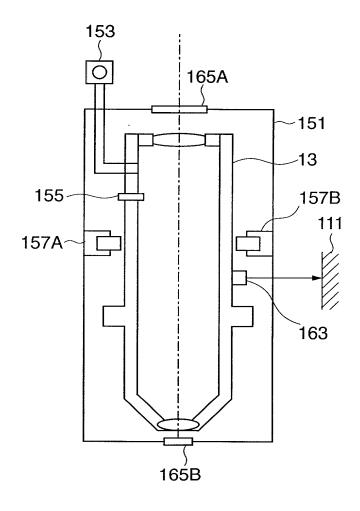

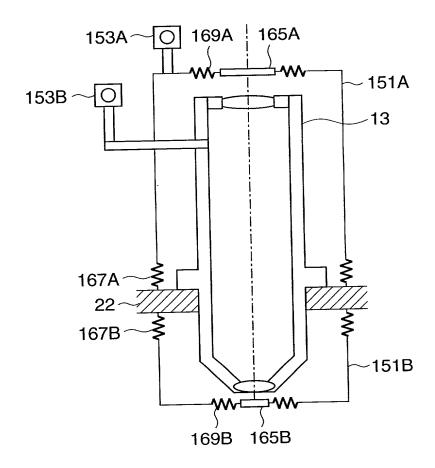

.

TO THE THE PROPERTY OF THE PRO

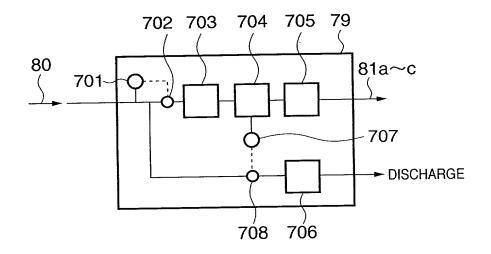


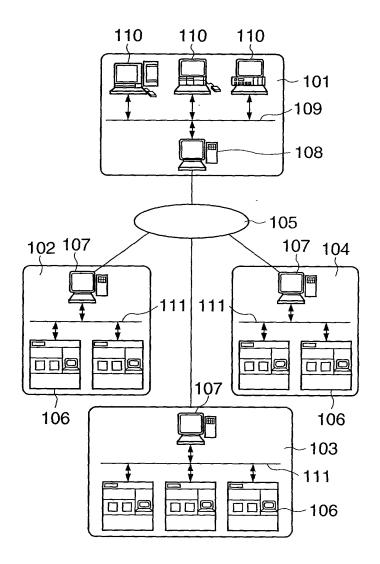


FIG. 10



| URL http:/  | //www.maintain.co.jp/db/input.html  |
|---|---|
| TROUBLE DB INPUT WINDOW                                       |   |
|   |   |
|   |   |
| OCCURRENCE DATE 2000/3/15 404                                 |   |
| TYPE OF APPARATUS ********* ~ 401                             |   |
| SUBJECT OPERATING ERROR (START-UP ERROR) 403                  |   |
| SERIAL NUMBER S/N 465NS4580001 402                            |   |
| DEGREE OF URGENCY D 405                                       |   |
| SYMPTOM   | LED IS KEPT FLICKERING AFTER   位   1  |
|   | <u>□</u>  |
| DEMERY  |   |
| REMEDY  | POWER ON AGAIN (PRESS RED BUTTON IN ACTIVATION) 407   |
|   |   |
| DDOCDESS  | (中) I |
| IIPhodhess  | TINTERIIVI HAS BEEN DONE 408  |
|   |   |
| (SEND) (RE  | (中)   |
|   |   |
| LINK TO RESULT LIST DATABASE SOFTWARE LIBRARY OPERATING GUIDE |   |
|   |   |

FIG. 12

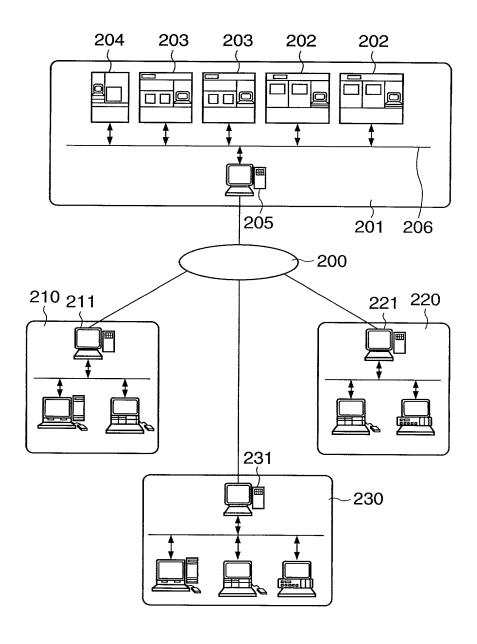